

# Multiload 150 **PRO**



**Battery Charger | 150/75 A | 2000 W | 12/24 V**


## Electrical Specifications

AC Input voltage	90 to 286 V
Frequency	30 to 70 Hz
Nominal input current at rated output	< 9A
Output Nominal voltage	12 / 24 V (manual selection)
Output Current	150A (12V) 1875A (24V)
Rated output current	Manual selection
Rated output (Watt)	2000W
Load regulation	1.5%
Compatible batteries	150 to 600 Ah
Compatible battery types	Wet, AGM, Gel, SLA, LiFePO <sub>4</sub>
Charging voltage	4 charging voltages available for manual selection
Parallel outputs	Maximum of two devices connected in parallel
Efficiency	80%

## Mechanical Specifications

Dimensions (L×W×H)	315 × 201 × 82 mm
Weight	4kg
Operating temperature	-10 to 40 °C
Storage temperature	-20 to 80 °C

## Dimensions

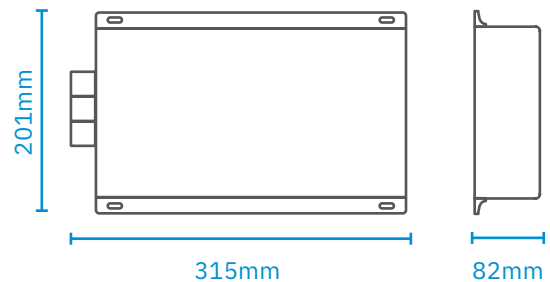

## Series and Parallel Connection

